

## Model # OG-4000-DM

Model # OG-4000-DM 1-PH 230V AC, Grid Tie String Inverter with Built in 2xMPPT Controllers



### Product Description

OG-4000-DM String Inverter Series is the ideal solution for commercial & industrial usage. Parallel capability upto 100nos allows to simply up the scalability and enhancing the overall plant capacity. With the characteristics of dual independent input sections with 2 independent MPP trackers, wide MPPT tracking range, True three phase transformer-less design, IP65 harshest industrial grade protection level, convectional cooling system and embedded RS485, WIFI and optional SNMP interface, it forms Magnizon Trio String Inverter an ideal solution for medium and large PV Power Station.

## Model # OG-4000-DM

### Key Features

- Wide PV input voltage range
- Rapid MPPT tracking technology
- 25years of design life
- IP65 protection degree, suitable for outdoor installation, reducing
- Redundant control circuit design for more reliability
- Unique low voltage ride through (LVRT) function
- Advanced DSP control systems
- Supports SVG function, realization of power reactive compensation at night
- Supports variety of communication protocols
- 5years warranty extendable to 10years
- Superior PV energy harvest
- Transformers less design with higher operation efficiency
- Excellent natural thermal design
- High over load capability under most ambient conditions

#### **Full data display and communications**

- Customization LCD display all the inverter operation message
- Bright LED indicators imply system status at a glance
- PC software for remote monitoring and system trouble shooting , iOS & Android real time power monitoring software (life time free of cost)
- High speed RS-232, RS-485 communications port.

#### **Cost advantages**

- Transformer less design cutting down the cost
- Light weight and small dimension, reducing shipping cost
- IP65 protection degree, suitable for outdoor installation, reducing
- Construction cost
- Low maintenance expense

### Applicable Standards

- ISO9001: 2015, ISO14001:2015
- Compliance to RoHs & CE
- IEC62109-1, IEC62109-2, NBT/T32004, EN61000-6-2/3/4, EN61000-3-11/12, VDE-AR-N 4105, IEC61727, G59, G83, RD1663AS4777

## Model # OG-4000-DM

### Specifications


MODEL	OG-4000-DM
<b>INPUT (DC)</b>	
Max. DC input power	4400W
Max.DC input voltage	600Vdc
Max. Input Current	20.8A (2x10.4A)
MPPT tracking voltage range	70~580Vdc
MPPT operating voltage range (full load)	200-520V
Min. / start DC voltage	90Vdc
Number of MPPT tracking	2
Maximum number of PV strings	2
<b>OUTPUT (AC)</b>	
Rated AC active power	4000W
Max. AC active Power (Pf=1)	4200W
Max. AC apparent power	4200VA
Rated output voltage	220/230/240Vac
AC output topology	1Ph+N+PE
Output voltage range	(1±15%) x Normal AC Voltage (adjustable ±5%,±10%,±15%,±20%)
Gird frequency range	50/60Hz(±4.5Hz), (adjustable)
Max. AC output current	19A
Power factor (cosΦ)	( 0.8 leading – 0.8 lagging) (adjustable)
Total harmonic current distortion (THDi)	<2%
DC Current Injection	<0.5%In
<b>PROTECTION DEVICES</b>	
Input DC switch	YES
Anti-islanding protection	YES
AC overcurrent protection	YES
AC short circuit protection	YES

## Model # OG-4000-DM

DC reverse connection	YES
Anti-surge protection	YES
Insulation resistance detection	YES
Leakage current protection	YES
Intelligent reactive power regulator	YES
PID	YES
<b>SYSTEM FEATURES</b>	
Topology	Transformer less
Max. efficiency	>98.8%
Euro efficiency	>98.4%
MPPT efficiency	>99%
Standby(night time) losses	<5W
Front Panel	LED/LCD Display
Cooling	Natural Cooling
Communication interface	RS485, USB, Ethernet, WIFI(optional), GPRS(optional)
Warranty	5years(optional 10/15/20years)
<b>ENVIRONMENTAL</b>	
Operating temperature	-25.0 to 60.0 °C
Humidity range	0~99% (non-condensing)
Altitude	4000m
Noise level	<30dB
Protection rating	IP65
<b>PHYSICAL</b>	
Dimension W×L×D (mm)	335*426*125
Net Weight (kg)	12.85Kgs
<b>STANDARDS</b>	
Grid Code	NB/T32004, VDE-AR-N 4105, IEC 61727
Safety/TUV	IEC62109-1, IEC62109-2
EMC	EN 61000-6-2 , EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12
Quality Standards	ISO9001:2015, ISO14001, RoHs

Model # OG-4000-DM

Efficiency (%)

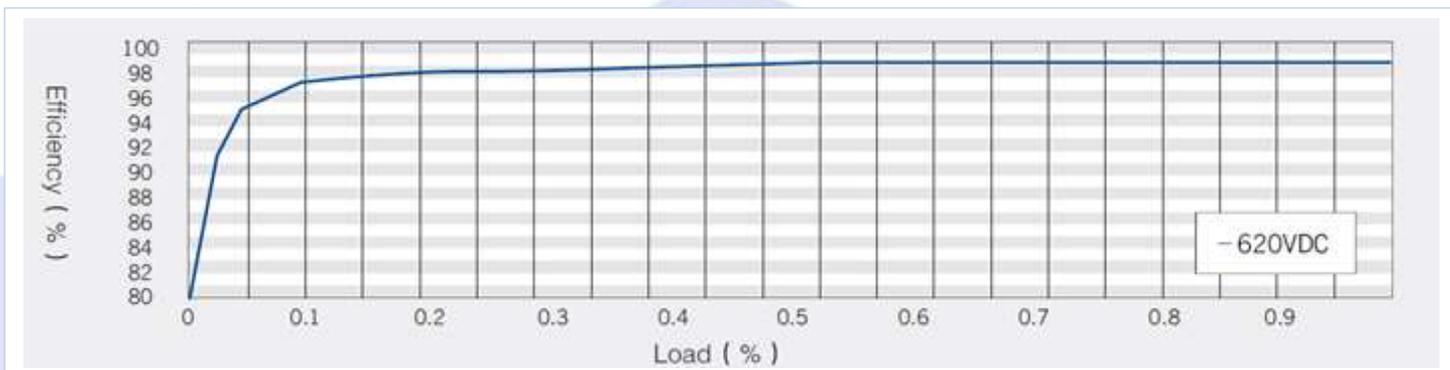

Bottom view



Copyright © 2012 MAGNIZON POWER SYSTEMS. All rights reserved. All trademarks are the sole property of their respective owners. MAGNIZON POWER SYSTEMS has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.